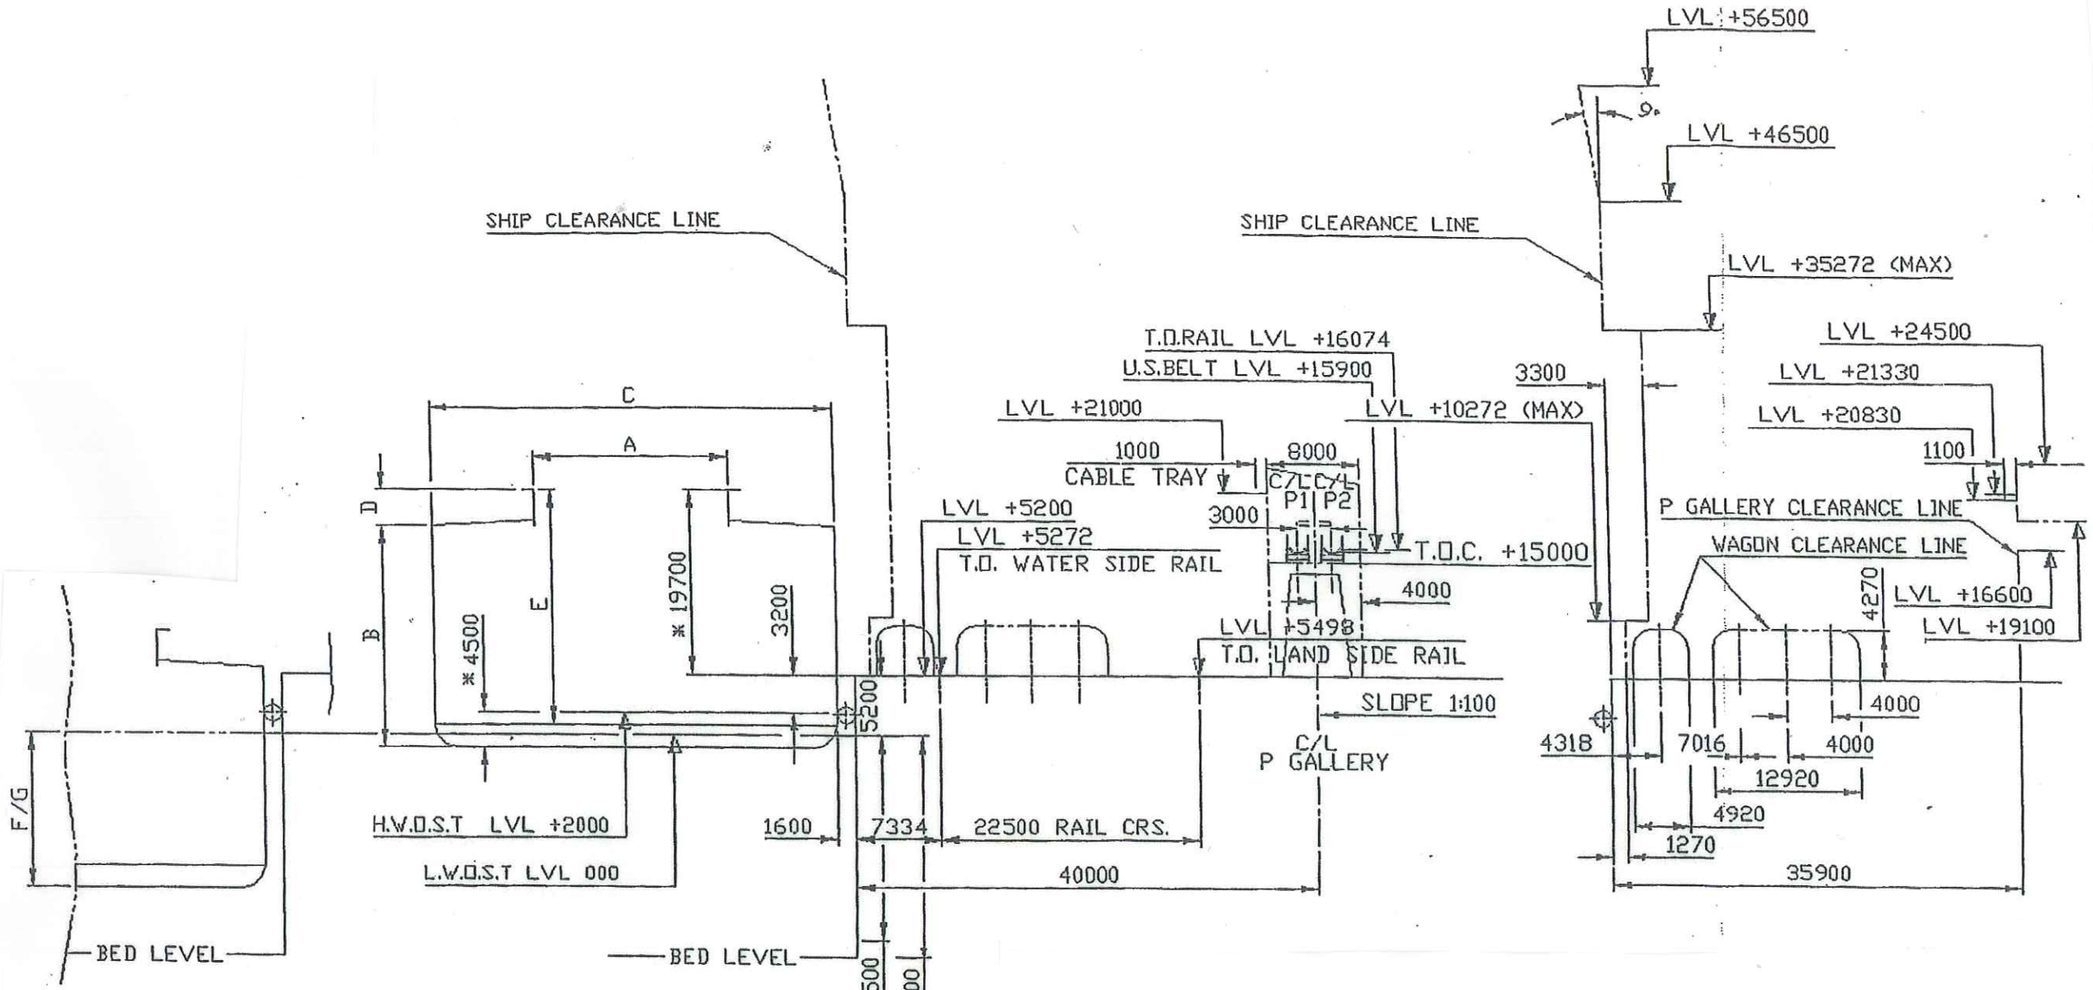

	DIMENSION	MIN.	REQUIRED EMPLOYER SPECIFICATION MAX.	ADDITIONAL OPTION TO BE PRICED MAX.
A	HATCH OPENING SIZE	6000	25000	21580
B	SHIP DEPTH	14000	27000	24400
C	BEAM	21000	55000	48000
D	COAMING HEIGHT	1600	4500	3100
E	HOLD DEPTH	10900	27000	25900
F	DRAUGHT (FULLY LADEN)	9500	17500	17500
G	DRAUGHT (BALLAST BUT EMPTY)	4000	5500	5500

NOTES

1. DIMENSIONS MARKED * INDICATE THE WORST CASE SCENARIO FOR THE LOADING OF A TYPICAL CAPE SIZE VESSEL
   i.e. LIGHT BALLAST AT H.W.O.S.T WHICH IS 2 METERS ABOVE CHART DATUM LOADING OF A TYPICAL CAPE SIZE VESSEL
2. CHART DATUM = L.W.O.S.T
3. MAX L.O.A 335 METERS

REV. NO.	DATE	REVISION	BY	APP.
REV0	07/10	ISSUED FOR INFORMATION ONLY		

PORT OF RICHARDS BAY
BULK EXPORT TERMINAL
SHIPS & QUAY PARAMETERS AND CLEARANCE PROFILES

REFERENCE DRAWINGS

DRAWING NUMBER

SCALE N.T.S

DRAWING NO. HED 1055

FORMAT A3

REVISION 0

TRANSNET port terminals